

# MTL4525 – MTL5525

## SOLENOID/ALARM DRIVER

switch operated with override, IIC, low power

The MTLx525 enables an on/off device in a hazardous area to be controlled by a volt-free contact or logic signal in the safe area. It can drive loads such as solenoids, alarms, LEDs and other low power devices that are certified as intrinsically safe or are classified as non-energy storing simple apparatus.

The MTL4525 allows a second safe-area switch or logic signal to be connected that enables the output to be disabled to permit, for example, a safety system to override a control signal.

### SPECIFICATION

See also common specification



#### Number of channels

One

#### Location of load

Zone 0, IIC, T4–6 hazardous area if suitably certified  
Div.1, Group A, hazardous location

#### Minimum output voltage Equivalent output circuit



#### Hazardous-area output

Minimum output voltage: 7.8V at 48mA  
Maximum output voltage: 24V from 300Ω  
Maximum off-state output voltage: 4V from 300Ω  
Current limit: 48mA minimum

#### Output ripple

< 0.5% of maximum output, peak-to-peak

#### Control input on MTL4525

Suitable for switch contacts, an open collector transistor or logic drive

0 = input switch closed, transistor on or < 1.4V applied

1 = input switch open, transistor off or > 4.5V applied

#### Override input on MTL4525

An open collector transistor or a switch connected across the terminals can be used to turn the output off whatever the state of the control input

0 = transistor on or switch closed

1 = transistor off or switch open


#### Control and override inputs on MTL4525

| Control input | Override input | Output state |
|---------------|----------------|--------------|
| 0             | 0              | off          |
| 0             | 1              | on           |
| 1             | 0              | off          |
| 1             | 1              | off          |


#### Response time

Output within 10% of final value within 100ms

### MTL4525

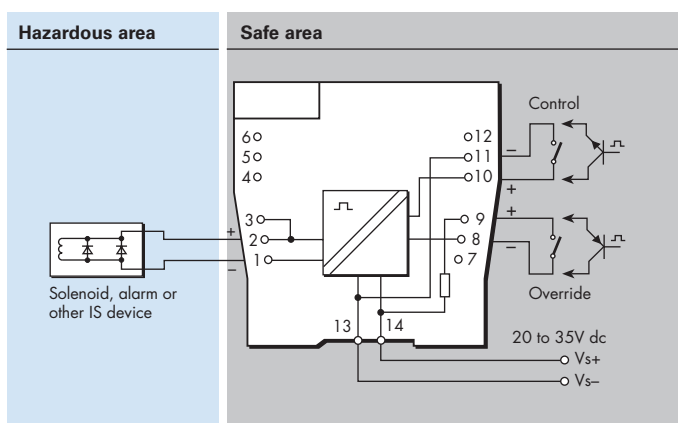

### MTL5525

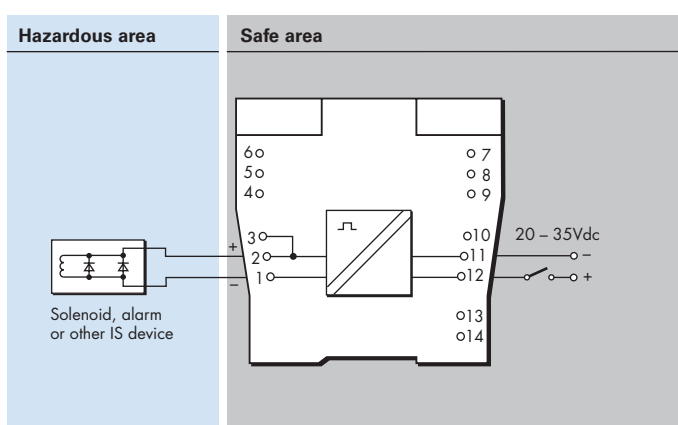

#### LED indicators

Green: power indication

Yellow: output status, on when output active

#### Maximum current consumption

100mA at 24V dc

#### Power dissipation within unit

1.3W with typical solenoid valve, output on

1.9W worst case

#### Safety description

$U_o=25V$   $I_o=83.3mA$   $P_o=0.52W$   $U_m=253V$  rms or dc



#### SIL capable

These models have been assessed for use in IEC 61508 functional safety applications.

SIL2 (SIL3 for MTL5525) capable for a single device (HFT=0)

SIL3 capable for multiple devices in safety redundant configurations (HFT=1)

See data on MTL web site and refer to the safety manual.



Powering Business Worldwide

**Eaton Electric Limited,**  
Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.  
Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283  
E-mail: [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)  
[www.mtl-inst.com](http://www.mtl-inst.com)

© 2017 Eaton  
All Rights Reserved  
Publication No.  
EPSx525 Rev8 040517

**EUROPE (EMEA):**  
+44 (0)1582 723633 [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)  
**THE AMERICAS:**  
+1 800 835 7075 [mtl-us-info@eaton.com](mailto:mtl-us-info@eaton.com)  
**ASIA-PACIFIC:**  
+65 6 645 9888 [sales.mtlsing@eaton.com](mailto:sales.mtlsing@eaton.com)

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.  
In the interest of further technical developments, we reserve the right to make design changes.